


DIRECTLED – LRL Series

FEATURES & SPECIFICATION SHEET

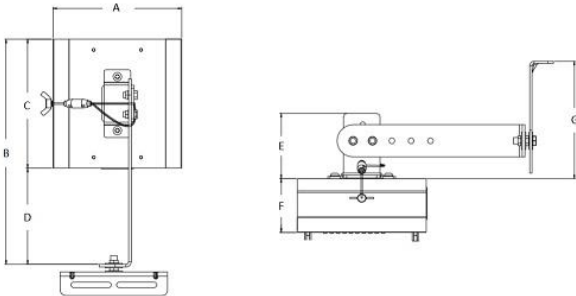

Application

The LRL Low Profile series LED Module can any light fixture into an energy efficient LED. It is specifically designed to replace HID, MH, and HPS lamps in existing Street Light, Wall pack and Canopy light fixtures providing 60-90 percent in energy savings.

Features

- 160 degree beam angle.
- Direct to AC (Direct Wire) connection.
- External Driver (Meanwell).
- Designed for use in open or enclosed fixtures.
- Standard No lens.
- ETL listed. Compact Flat Design with L Mount.

LED PCB & Driver

A long lifetime rating of 50,000 hours or about 10 years operating hours 12 hours per 7 days per week. LED array and Driver features Class P rating, THD of less than 10, constant output wattage, and a fail-safe protection.

Warranty

All DIRECTLED Series lamps are guaranteed for 5 years against manufacturing defects. 10 year optional



Ordering Information												
ECO-GI-RFK- _ - _ - _ - _												
Example:												
MODEL	Watts	CCT	Mount	DRIVER	Lumens	A	B	C	D	E	F	G
ECO-GI-RFK	30	4000K	Adjustable L Bracket	U-120V/277V V-480V	3900	4.7"	8.3"	4.7"	3.5"	2.4"	2"	4.3"
	45	5000K			5850	4.7"	8.3"	4.7"	3.5"	2.4"	2"	4.3"
	60				7800	4.7"	8.3"	4.7"	3.5"	2.4"	2"	4.3"
	75				9750	5.1"	9.5"	6.1"	3.4"	2.4"	2"	4.3"
	100				13000	5.1"	9.5"	6.1"	3.4"	2.4"	2"	4.3"
	120				15600	5.1"	9.5"	6.1"	3.4"	2.4"	2"	4.3"
	150				19500	5.9"	11.6	7.9"	3.7"	2.4"	2"	4.3"
	200				26000	5.9"	11.6	7.9"	3.7"	2.4"	2"	4.3"
	280				36400	10"	14.1	10.6	3.5"	2.9"	2"	4.3"
	320				41600	10"	14.1	10.6	3.5"	2.9"	2"	4.3"