




EcoLightingUSA

DIRECTLED BLE Series

FEATURES & SPECIFICATION SHEET

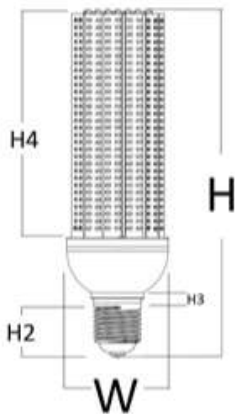

Application

The BLE Series LED retrofit lamp is designed to replace Metal Halide (MHL), High Pressure Sodium (HPS) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60-90% in energy savings.

Suitable for use in Post Top, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features

- 360° beam angle, E26 / E39 Base
- Direct to AC (Direct Wire) connection
- 140 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- Durable Construction
- UL Listed, DLC Certified
- Rated IP20

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

Ordering Information		
BLE40	- 5K -	E39
Model	Color	Base



MODEL	*COLOR TEMP	BASE	VOLTS (120-277V)	WATTS	LUMENS	REPLACES (Metal Halide, HPS, CFL)	DIMENSIONS					
							H	H2	H3	H4	W	W2
BLE15	5000k	E26*	U	15w	2100Lms	50w	6"	1.1"	0.4"	3.1"	2.7"	2.2"
BLE20	5000k	E26*	U	20w	2800Lms	100w	5.6"	1.1"	0.4"	2.7"	2.7"	3.1"
BLE30	5000k	E26*	U	30w	4200Lms	150w	6.4"	1.1"	0"	3.1"	3.5"	2.6"
BLE40	5000k	E26*	U	40w	5600Lms	250w	8.5"	1.1"	0.4"	4.6"	3.5"	2.8"
BLE60	5000k	E39	U	60w	8400Lms	300w	10.7"	1.6"	0.6"	6"	3.5"	2.8"
BLE80	5000k	E39	U	80w	11200Lms	350w	9.8"	1.6"	0"	5.5"	4.4"	3"
BLE100	5000k	E39	U	100w	14000Lms	400w	11.1"	1.6"	0.6"	5.8"	4.4"	3"
BLE120	5000k	E39	U	120w	16800Lms	600w	11.5"	1.6"	0.8"	6"	4.9"	3.3"
BLE150	5000k	E39	U	150w	21000Lms	800w	13"	1.8"	0.8"	8.3"	4.9"	4.3"

* 15-40W E26 is Standard but is available with Mogul Base Adaptors (E26 to E39)

(*Available Color Temp Range 3000k – 6500k on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606