



EcoLightingUSA

DIRECTLED BLE2HV (Low or High Voltage)

FEATURES & SPECIFICATION SHEET

Application

The BLE2HV Retrofit Lamp is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60-90% in energy savings.

Suitable for use in: High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- 360° beam angle
- E26 / E39 Base
- Direct to AC (Direct Wire) connection
- High Efficiency 155 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- IP20, Durable Construction
- ETL Listed
- DLC Listed 40w-250w

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty


Lamp is guaranteed for 5 years against manufacturing defects.

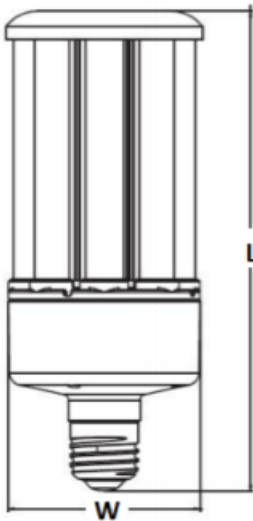

Ordering Information

BLE2HV80 - H - 5K - E39

Model	Volts	Color	Base
BLE2HV80	H	5K	E39

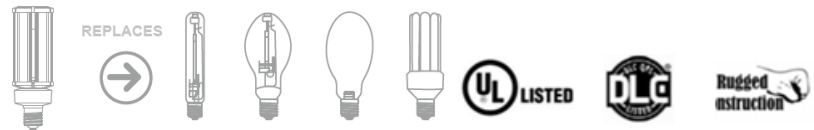

MODEL	VOLTS L = 120-277V H = 347-480V	*COLOR TEMP	BASE	WATTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS (E26/E39 L x W)	ETL / DLC LISTED
BLE2HV30	L / H	5000k	E26/E39	30w	4650Lms	150w	7.3"/7.7"x3.7"	ETL
BLE2HV40	L / H	5000k	E26/E39	40w	6200Lms	250w	7.9"/8.3"x4.2"	ETL DLC
BLE2HV60	L / H	5000k	E26/E39	60w	9300Lms	320w	9.8"/10.2"x4.2"	ETL DLC
BLE2HV80	L / H	5000k	E26/E39	85w	13175Lms	400w	10.6"/11"x4.2"	ETL DLC
BLE2HV100	L / H	5000k	E39	100w	15500Lms	450w	11.6"/12"x5.2"	ETL DLC
BLE2HV120	L / H	5000k	E39	120w	18600Lms	500w	10.6"x5.2"	ETL DLC
BLE2HV150	L / H	5000k	E39	150w	23250Lms	600w	10.6"x5.2"	ETL DLC
BLE2HV200	L / H	5000k	E39	200w	31000Lms	800w	11.7"x5.2"	ETL DLC
BLE2HV250	L / H	5000k	E39	250w	38750Lms	1000w	12.3"x5.2"	ETL DLC
BLE2HV300	L / H	5000k	E39	300w	46500Lms	1200w	13.4"x5.2"	ETL

(*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606