




EcoLightingUSA

DIRECTLED BLE2HVC Compact Series (Low or High Voltage)

FEATURES & SPECIFICATION SHEET

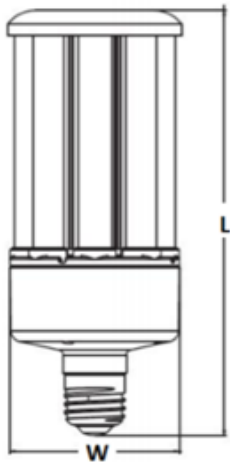

Ordering Information			
BLE2HVC40 - H - 5K - E26			
Model	Volts	Color	Base

Application

The BLE2HVC Compact Series LED Retrofit Lamp is specifically designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60-90% in energy savings.

Suitable for use in: High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- 360° beam angle, E26 / E39 / EX39 Base
- Available in 120v-277v or 300v-480v
- Direct to AC (Direct Wire) connection
- High Efficiency 155 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- IP20, Low Profile
- Durable Construction
- ETL Listed
- DLC Listed 120v-277v (40w-105, E39 only) and 480v (40w-65w E39)

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

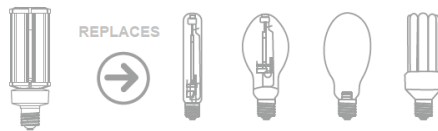

MODEL	VOLTS L = 120-277V H = 347-480V	*COLOR TEMP	BASE	WATTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS (E26/E39 & EX39 L x W)	LISTED
BLE2HVC30	L	5000k	E26/E39/EX39	30w	4650Lms	150w	6.3"/6.69"x 4.17"	ETL/CE
BLE2HVC40	L / H	5000k	E26/E39/EX39	40w	6200Lms	175w	6.3"/6.69"x 4.17"	L – ETL/DLC/CE H – ETL/DLC
BLE2HVC50	L / H	5000k	E26/E39/EX39	50w	7750Lms	200w	6.3"/6.69"x 4.17"	ETL/DLC
BLE2HVC65	L / H	5000k	E26/E39/EX39	65w	10075Lms	250w	6.5"/6.89"x 4.17"	ETL/DLC
BLE2HVC85	L / H	5000k	E26/E39/EX39	85w	13175Lms	400w	6.5"/6.89"x 4.17"	L – ETL/DLC H – ETL
BLE2HVC105	L / H	5000k	E39/EX39	105w	16275Lms	450w	9.65"x 4.17"	L – ETL/DLC H – ETL
BLE2HVC135	L / H	5000k	E39/EX39	135w	20925Lms	550w	9.45"x 5.20"	L – N/A H – ETL

(*Available Color Temp Range 3000k – 6500k (Warm – Cool) on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606