




EcoLightingUSA

DIRECTLED EL-LHB5 Linear High Bay

FEATURES & SPECIFICATION SHEET

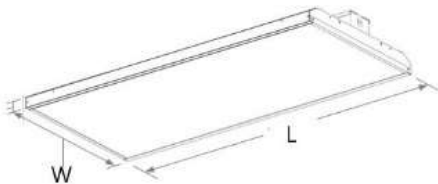

Application

The Power Bay 5 Series is perfect for T5, T8, Metal Halide, and High Pressure Sodium replacements. It can be used in various locations. All aluminum construction allows for excellent heat dissipation, leading to long life. Designed specifically for warehouses, production facilities, factories, Sports arenas.

Features


- Uniform Light Distribution
- Steel housing with Acrylic Lens
- 130 Lm/Watt LED Array
- Long Life Multi voltage LED Driver
- Standard Form Factor
- CRI > 80
- DLC, ETL Certified

LED PCB & External Driver

A long lifecycle rating of 50,000 hours or about 10 years operating hours 12 hours per 7 days per week. LED array and Driver features Class P rating, THD of less than 10, constant output wattage, and a fail-safe protection.

Warranty

Guaranteed for 5 years against manufacturing defects. 10 Year Optional

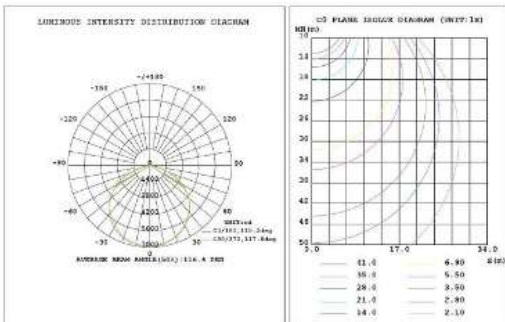

Ordering Information		
Model	Color	Volts
ELHB5	5K	L

MODEL	*COLOR TEMP	VOLTS L = 120-277V	WATTS	LUMENS	DIMENSIONS
ELHB5-105	5000k	L	105w	13650	24.56"x17.4"
ELHB5-160	5000k	L	160w	20800	24.56"x17.4"
ELHB5-200	5000k	L	200w	26000	29.75"x17.4"
ELHB5-280	5000k	L	280w	36000	45.75"x15.9"
ELHB5-320	5000k	L	320w	44000	45.75"x17.25"
ELHB5-425	5000k	L	425w	57000	45.78"x21.9"



EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606