
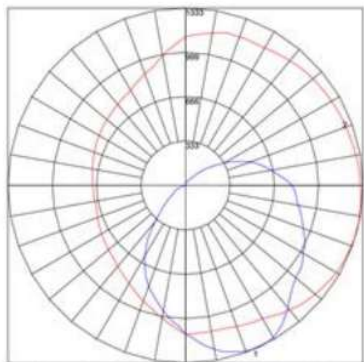


# DIRECTLED –Eco-WP/WPM Induction Wall Pack

## FEATURES & SPECIFICATION SHEET

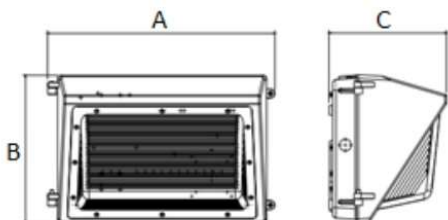

Maximum Candels = 1332/004 Located At Horizontal Angle = 345, Vertical Angle = 25  
# 1 - Vertical Plane Through Horizontal Angle (345 - 165) (Through Max. Cd.)  
# 2 - Horizontal Plane Through Vertical Angle (25) (Through Max. Cd.)

### Application

The ECO WP Series Induction Wall Pack features the Classic design with square induction lamp. Sturdy aluminum construction with a durable glass lens provides for a long lasting induction wall pack light fixture with optimal light spread. Features a high >0.98 power factor for cool, efficient, flicker-free operation.

Common applications include Parks, shopping malls, outlets, plazas, city halls and historic areas.

### Features

- IP65 Frame
- Square Induction lamp
- Induction ballast, voltage AC100-277V
- Glass Lens for full light spread
- Easy to install and operate
- 50 to 60 percent energy reductions
- UL Certified

### Lamp & Ballast

A long lifecycle rating of 100,000 hours

### Warranty

Fixture is guaranteed for 5 years against manufacturing defects.

| MODEL     | COLOR TEMP | WATTS | LUMENS   | REPLACES<br>(HPS MHL HID) | DIMENSIONS<br>L x W x D |
|-----------|------------|-------|----------|---------------------------|-------------------------|
| ECO-WPM40 | 5000k      | 40w   | 3200Lms  | 100w                      | 14.25" x 9" x 7.25"     |
| ECO-WPM60 | 5000k      | 60w   | 4800Lms  | 120w                      | 14.25" x 9" x 7.25"     |
| ECO-WP80  | 5000k      | 80w   | 6500Lms  | 160w                      | 18.13" x 9" x 9.38"     |
| ECO-WP100 | 5000k      | 100w  | 8100Lms  | 200w                      | 18.13" x 9" x 9.38"     |
| ECO-WP120 | 5000k      | 120w  | 9600Lms  | 250w                      | 18.13" x 9" x 9.38"     |
| ECO-WP150 | 5000k      | 150w  | 12000Lms | 400w                      | 18.13" x 9" x 9.38"     |