

FEATURES & SPECIFICATION SHEET

Application

The IRF6 series aluminum 2x2 fixtures is an ideal choice for replacement of common Fluorescent and Metal Halide grid-mounted recessed 2x2 or 2x4 fixtures. Its electronic ballast features a high >0.98 power factor for cool, efficient, flicker free operation. Common applications include service corridors, offices, conference centers, interior stairwells, utility closets, lobbies, shopping malls, sports facilities, showrooms, supermarkets as well as a myriad of retail and wholesale applications.

Features


- IP20 Rated Die Cast Aluminum Housing, white powder-coat finish
- Constructed of a stamped steel housing, Powder-coat finish over a Chromate Conversion Coating
- White (Custom Colors Available)
- UV stabilized and heat resistant high transmission acrylic lens
- ETL Listed

Lamp & Ballast

A long lifecycle rating of 100,000 hours

Warranty

All Induction Luminaires are guaranteed for 5 years against manufacturing defects.

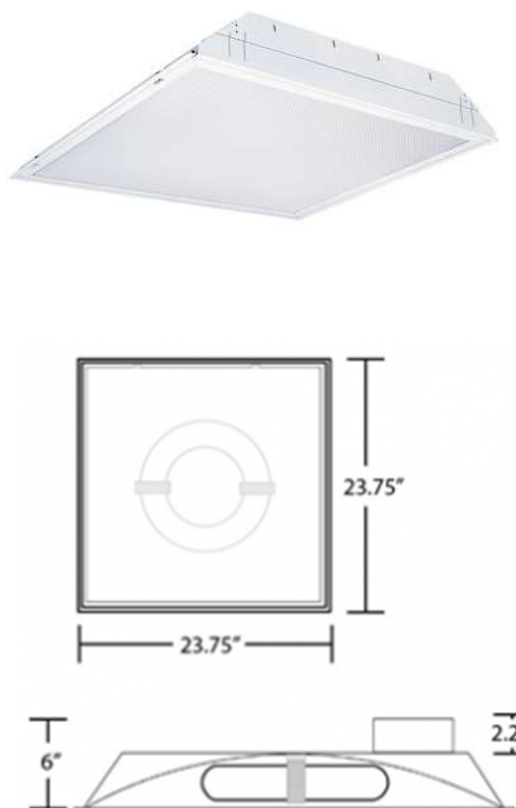

| MODEL | WATTS | *COLOR TEMP | VOLTS U = 120-277v | DIMENSIONS (W x L) |
|--------|-------|-------------|-----------------------|-----------------------|
| IL640 | 40w | 5000k | U | 23.75" x 23.75" |
| IL660 | 60w | 5000k | U | 23.75" x 23.75" |
| IL680 | 80w | 5000k | U | 23.75" x 23.75" |
| IL6100 | 100w | 5000k | U | 23.75" x 23.75" |
| IL6120 | 120w | 5000k | U | 23.75" x 23.75" |
| IL6150 | 150w | 5000k | U | 23.75" x 23.75" |