




# DIRECTLED – LED Area Light with Thermal Control – AL-8080 Series

## FEATURES & SPECIFICATION SHEET

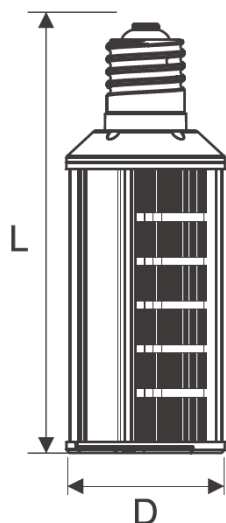

### Ordering Information

AL-8080 - 40 - 5K - E39  
Model Watts Color Base

### Application

The LED Area Light with Thermal Control, Series AL-8080 is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps.

Suitable for use in Area Lighting, Parking Lots, Street Lighting, Roadway, Shoe Box Fixtures and much more.

### Features

- 360° Rotatable Lamp Base, Adjustable Lighting Direction
- 150 Lumens/Watt
- Dark Skies Compliant
- Suitable for Enclosed Fixtures
- Working Temp -40°F ~ 140°F (-40°C ~ 60°C)
- 4KV Surge Protection (20W, 30W, 40W), 6KV Surge Protection (60W)
- 5 Year Warranty

### LED PCB & Driver

A long lifecycle rating of 50,000 hours

### Warranty

Lamp is guaranteed for 5 years against manufacturing defects.



### THERMAL CONTROL



MODEL	WATTS	*COLOR TEMP	BASE	VOLTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS E26 / E39 (L x D)
AL-8080	20w	5000k	E26/E39	U (120-277V)	3000lm	100w	5.16"/5.83" x 3.62"
AL-8080	30w	5000k	E26/E39	U (120-277V)	4500lm	125w	7.01"/7.60" x 3.62"
AL-8080	40w	5000k	E26/E39	U (120-277V)	6000lm	200w	7.80"/8.46" x 3.62"
AL-8080	60w	5000k	E26/E39	U (120-277V)	9000lm	250w	9.96"/10.71" x 3.62"

(\*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606