


DIRECTLED – LED Corn Light CL-8902 Series

FEATURES & SPECIFICATION SHEET

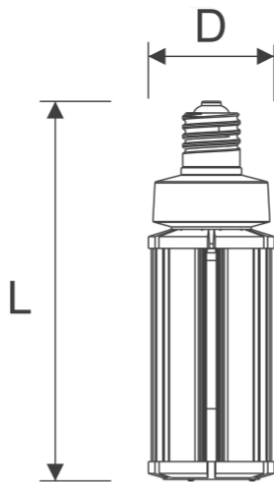

Application

The LED Corn Light, CL-8902 Series (also available with Intelligent Sensors CL-8909) is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps. Suitable for use in Post Top, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- Thermal Management System
- 150 Lumens/Watt
- Suitable for Enclosed Fixtures
- 4KV Surge Protection (12W-54W) /6KV Surge Protection (63W)
- Working Temp -40°F ~ 140°F (-40°C ~ 60°C)

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

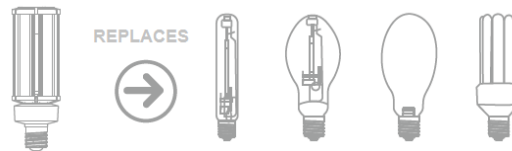

Ordering Information			
CL-8902	- 63 -	5K -	E39
Model	Watts	Color	Base

MODEL	WATTS	*COLOR TEMP	BASE	VOLTS U = 120-277V	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS E26/E39 (L x D)
CL-8902	12w	5000k	E26 / E39	U	1800lm	50w	4.92"/5.55" x 2.36"
CL-8902	18w	5000k	E26 / E39	U	2700lm	75w	5.71"/6.34" x 2.36"
CL-8902	27w	5000k	E26 / E39	U	4050lm	150w	6.70"/7.32" x 2.36"
CL-8902	36w	5000k	E26 / E39	U	5400lm	175w	7.95"/8.62" x 3.35"
CL-8902	45w	5000k	E26 / E39	U	6750lm	200w	9.13"/9.80" x 3.35"
CL-8902	54w	5000k	E26 / E39	U	8100lm	250w	9.13"/9.80" x 3.35"
CL-8902	63w	5000k	E26 / E39	U	9450lm	320w	9.72"/10.39" x 3.35"

(*Available Color Temp Range 3000k – 6500k (Warm – Cool) on request.)