




DIRECTLED BLE3HVC IP64 Compact Series (Low or High Voltage)

FEATURES & SPECIFICATION SHEET

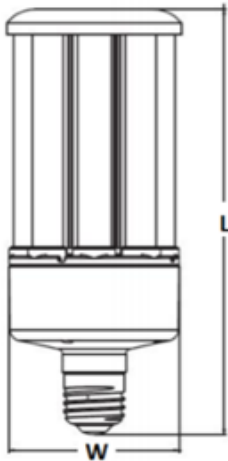

Application

The BLE3HVC IP64 Compact Series LED Retrofit Lamp is specifically designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60-90% in energy savings.

Suitable for use in: High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- 360° beam angle, E26 / E39 / EX39 Base
- Available in 120v-277v or 347v-480v
- IP64 Rated
- Direct to AC (Direct Wire) connection
- High Efficiency 140 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- Flame Retardant Material
- ETL Listed (**120v-277v only, all wattages**)

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

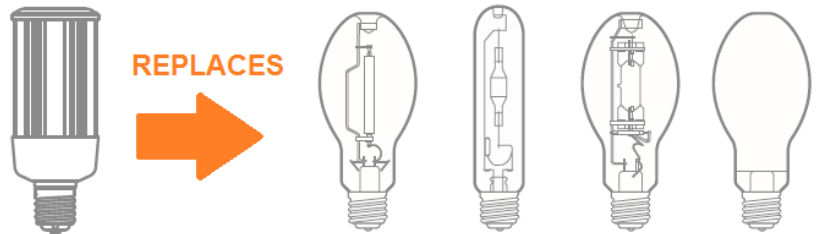

Ordering Information

BLE3HVC53 - H - 5K - EX39

Model Volts Color Base

MODEL	VOLTS L = 120-277V H = 347-480V	*COLOR TEMP	BASE	WATTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS (E26/E39 & EX39 L x W)	LISTED
BLE3HVC36	L / H	5000k	E26/E39/EX39	36w	5040Lms	150w	7.28"/7.80" x 3.35"	L - ETL
BLE3HVC54	L / H	5000k	E26/E39/EX39	54w	7560Lms	200w	8.07"/8.58" x 3.35"	L - ETL
BLE3HVC63	L / H	5000k	E26/E39/EX39	63w	8820Lms	220w	8.86"/9.37" x 3.35"	L - ETL

(*Available Color Temp Range 3000k – 6500k (Warm – Cool) on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606