



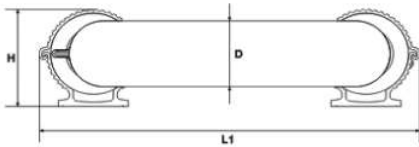

# INDUCTION – SL-UV Series Germicidal Ultraviolet Induction

## FEATURES & SPECIFICATION SHEET

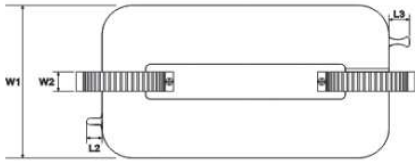

Watts	D	H	W1	W2	L1	L2	L3
40W	1.65"	3.03"	4.57"	0.73"	7.72"	.79"	.79"
60W	1.65"	3.03"	4.57"	0.73"	7.72"	.79"	.79"
80W	2.12"	3.25"	5.51"	0.73"	11.81"	.79"	.79"
100W	2.12"	3.25"	5.51"	0.73"	11.81"	.79"	.79"
120W	2.12"	3.25"	5.51"	0.73"	14.60"	.79"	.79"
150W	2.12"	3.25"	5.51"	0.73"	15.75"	.79"	.79"
200W	2.12"	3.66"	5.91"	.89"	17.16"	.79"	.79"
250W	2.12"	3.66"	5.91"	.89"	17.16"	.79"	.79"
300W	2.12"	3.66"	6.06"	1.02"	21.97"	.79"	.79"
400W	2.12"	3.66"	6.22"	1.38"	27.95"	.79"	.79"

### Application

Our SL-UV Series lamp is a type of Induction Lamp that emits UV (Ultraviolet) rays commonly used in the sterilization and disinfection industries. UV lights are commonly used in medicine, photodynamics and epidemic prevention. It kills all kinds of bacteria, viruses, parasites, algae and other pathogens in the air, water, or on surfaces.

### Features

- Lamp envelope is constructed of quartz glass
- Electrodeless ultraviolet generator
- Low Energy Consumption
- Long Service Life (60,000 hrs)
- No Secondary Pollution
- No need for chemical agents
- Radiation Illuminance 10x that of common UV products
- UL Listed Ballasts

### Warranty

Guaranteed for 5 years against manufacturing defects.

MODEL	WATTS	VOLTS U = 120-277	Ultraviolet Radiation Pwr (mw)	Wavelength (nm)	DIMENSIONS L1 / H / D
SL40UV	40	U	62	253.7 - 380	7.72" x 3.03" x 1.65"
SL60UV	60	U	93	253.7 - 380	7.72" x 3.03" x 1.65"
SL80UV	80	U	124	253.7 - 380	11.81" x 3.25" x 2.12"
SL100UV	100	U	155	253.7 - 380	11.81" x 3.25" x 2.12"
SL120UV	120	U	186	253.7 - 380	14.6" x 3.25" x 2.12
SL150UV	150	U	232	253.7 - 380	15.75" x 3.25" x 2.12
SL200UV	200	U	310	253.7 - 380	17.16" x 3.66" x 2.12
SL250UV	250	U	387	253.7 - 380	17.16" x 3.66" x 2.12
SL300UV	300	U	450	253.7 - 380	21.97" x 3.66" x 2.12
SL400UV	400	U	600	253.7 - 380	27.95" x 3.66" x 2.12