


DIRECTLED – PUNCH FL3 Series LED Flood Light

FEATURES & SPECIFICATION SHEET

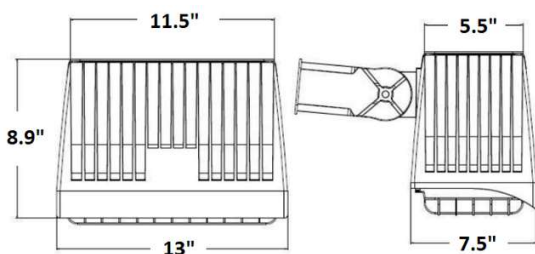

Ordering Information

FL3-80 - H

Model Volts

Application

The FL3 series outdoor Flood Light fixture is an ideal choice for replacement of common HPS and Metal Halide Flood lighting fixtures. Common applications include Parks, shopping malls, outlets, plazas, city halls and historic areas.

Features

- Available in: 120-277v (L) / 480v (H)
- Available in: 80w / 100w / 120w
- Slipfitter mounting for LED Flood/Area Light
- Tempered Flat Clear Glass Lens with aluminum reflector
- Die cast aluminum housing & hinged top frame, textured architectural bronze powder-coat finish over a chromate conversion coating
- Instant start and re-strike
- UL 1598 Listed for wet locations
- DLC

Performance

A long lifecycle rating of 100,000 hours

Warranty

Fixture guaranteed for 5 years against manufacturing defects.

MODEL	WATTS	VOLTS L = 120-277v H – 480v	COLOR TEMP	RETROFIT WATTAGE	LUMENS	DIMENSIONS
FL3-80	80w	L / H	5000k	300W	9600lm	11.5" x 8.9"
FL3-100	100w	L / H	5000k	400W	12000lm	11.5" x 8.9"
FL3-120	120w	L / H	5000k	500W	14400lm	11.5" x 8.9"