


G3L Series Induction Garage Fixture

FEATURES & SPECIFICATION SHEET

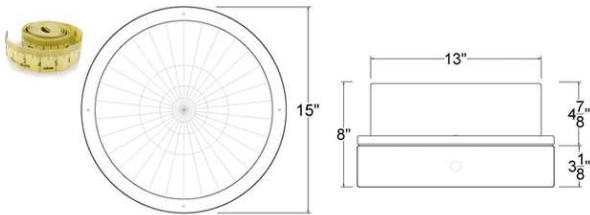

Application

The G3L series aluminum garage fixture is an ideal choice for replacement of common High Pressure Sodium and Metal Halide Garage fixtures. The electronic ballast features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include: service hallways, parking garages, loading docks, stairwells, utility closets, gas stations, shopping malls, even certain retail and wholesale applications.

Features

- G3 15" Round Garage / Canopy Fixture
- Die Cast Aluminum Housing with Bronze Powder-coat Finish
- Clear Prismatic Polycarbonate Lens
- UL listed for wet locations
- IP43 Rated

Lamp & Ballast

A long lifecycle rating of 50,000 hours

Warranty

Fixture guaranteed for 5 years against manufacturing defects.

| MODEL | WATTS | VOLTS L = 120-277v H = 480v | *COLOR TEMP | LUMENS | DIMENSIONS (W x L) |
|--------------|------------|-----------------------------------|----------------|----------------|-----------------------|
| G3L26 | 26w | L / H | 5000k | 3120Lms | 12" x 10" |
| G3L52 | 52w | L / H | 5000k | 6240Lms | 12" x 10" |

(*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)