




EcoLightingUSA

DIRECTLED G5L LED Garage Fixture

FEATURES & SPECIFICATION SHEET

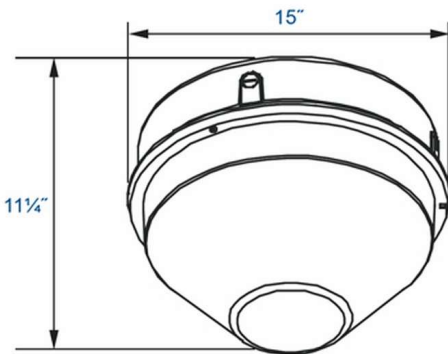

Application

The G5L series aluminum garage fixture is an ideal choice for replacement of common High Pressure Sodium and Metal Halide Garage fixtures. Its electronic ballast features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include: service hallways, parking garages, loading docks, stairwells, utility closets, gas stations, shopping malls, even certain retail and wholesale applications.

Features

- 15" Round Garage / Canopy Fixture
- Die Cast Aluminum Housing, Bronze Powder-coat Finish over a Chromate Conversion Coating
- Extended Clear Prismatic Polycarbonate Lens
- UL listed for wet locations
- IP43 Rated

Lamp & Ballast

A long lifetime rating of 100,000 hours or about 20 years operating hours 12 hours per 7 days per week. Electronic ballast features Class P rating, THD of less than 10%, constant output wattage, and fail-safe protection.

Warranty

Fixture guaranteed for 10 years against manufacturing defects. Lamp and ballast guaranteed for 5 years.

MODEL	WATTS	VOLTS L = 120-277v	*COLOR TEMP	LUMENS	DIMENSIONS (W x L)
LG526	26w	L	5000k	3120lm	15" x 11.25"
LG552	52w	L	5000k	6240lm	15" x 11.25"

(*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606