


# G7L Series Induction Garage Fixture

## FEATURES & SPECIFICATION SHEET

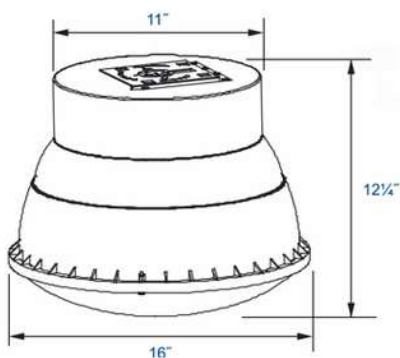

### Application

The G7L series aluminum garage fixture is an ideal choice for replacement of common High Pressure Sodium and Metal Halide Garage fixtures. The electronic ballast features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include: service hallways, parking garages, loading docks, stairwells, utility closets, gas stations, shopping malls, even certain retail and wholesale applications.

### Features

- 16" Round Garage / Canopy Fixture
- Die Cast Aluminum Housing with Bronze Powder-coat Finish
- Clear Prismatic Polycarbonate Lens
- UL listed for wet locations
- IP43 Rated

### Lamp & Ballast

A long lifecycle rating of 50,000 hours

### Warranty

Fixture guaranteed for 5 years against manufacturing defects.

MODEL	WATTS	VOLTS L = 120-277v H = 480v	*COLOR TEMP	LUMENS	DIMENSIONS
G7L-26	26w	L / H	5000k	3120Lms	12.25" x 16"
G7L-52	52w	L / H	5000k	6240Lms	12.25" x 16"

(\*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)